


XP-SK and XP-SKX Explosion Proof Shredder Pumps

The XP-SK and XP-SKX pumps meet NFPA (70), NEC and OSHA requirements for Class I, Division 1, Groups C & D hazardous locations (temp. code T4). BJM Pumps® tungsten carbide tip impeller rips solids apart with 360° shredding action for easier passage and virtually no clogs. Appropriate applications include chemical plants, municipal wastewater, manure wash-down, leachate, distilleries and spirits bottling installation.

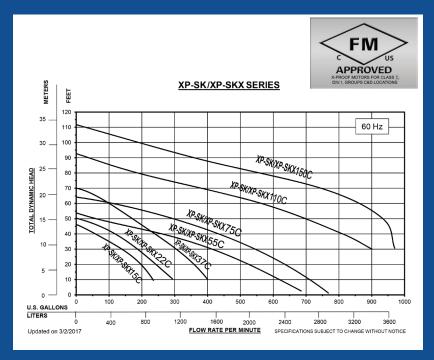

Features

- XP-SK offers a ductile iron impeller and wear plate with cast iron volute
- XP-SKX Series constructed of cast 316 stainless steel
- FM-approved explosion proof motor for use in Class I, Division 1, Groups C & D hazardous locations
- Oil-lubricated, double mechanical seal design featuring early warning seal failure protection circuit to ensure the longest pump and motor life
- Superior motor protection with NEMA Class F winding insulation and thermal sensor switches embedded in motor windings to provide both thermal and over amperage motor protection
- Durable, hardened cast iron construction to handle pumping sandy water and operating in harsh construction environments

XP-SK15C/ XP-SK15CSS	3" NPT-M	2	230/460/575	6.2/3.1/2.5	1.6"	42'	220	29.5"	14.75"	160
XP-SK22C/ XP-SKX22CSS	3" NPT-M	2	230/460/575	8.9/4.5/3.6	1.6"	45'	270	29.75"	15.25"	170
XP-SK37C/ XP-SKX37CSS	3" NPT-M	5	230/460/575	13.9/7/5.6	1.6"	62'	360	31"	15.25"	180
XP-SK55C/ XP-SKX55CSS	4" NPT-F	7.5	230/460/575	19.4/9.7/7.8	3.5"	54'	570	43.5"	29.5"	400
XP-SK75C/ XP-SKX75CSS	4" NPT-F	10	460/575	12.6/10	3.5"	64'	670	43.5"	29.5"	420
XP-SK110C/ XP-SKX110CSS	4" NPT-F	15	460/575	17.5/14.9	3.5"	92'	870	48.5"	35.15"	580
XP-SK150C/ XPSKX150CSS	4" NPT-F	20	460/575	24/19.2	3.5"	110'	900	57"	35.15"	775

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



104 John W Murphy Drive New Haven, CT 06513 Tel: (860) 631-3618 Fax: (860) 399-7784

Fax: (860) 399-7784
Web: www.flowsolutions.com

Distributor: